



Solar-Powered Winnower for Resource Use Efficiency and Sustainable Agricultural Development

V. M. Modi ^{a++}, Alok Gora ^{b#}, H. Sanchavat ^{c†*}, N. N. Desai ^{a‡},
U. D. Dobariya ^{a‡}, D. B. Chavda ^{a^} and V. M. Maheta ^{a^}

^a College of Renewable, Energy and Environmental Engineering, SDAU, S. K. Nagar, Gujarat, India.

^b Department of Agril. Engineering, C. P. College of Agriculture, SDAU, S. K. Nagar, Gujarat, India.

^c College of Agricultural Engineering and Technology, NAU, Dediapada, India.

Authors' contributions

This work was carried out in collaboration among all authors. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/JSRR/2024/v30i31868

Open Peer Review History:

This journal follows the Advanced Open Peer Review policy. Identity of the Reviewers, Editor(s) and additional Reviewers, peer review comments, different versions of the manuscript, comments of the editors, etc are available here: <https://www.sdiarticle5.com/review-history/112786>

Original Research Article

Received: 01/12/2023

Accepted: 06/02/2024

Published: 10/02/2024

ABSTRACT

Winnowing is an age-old agricultural practice that involves separating grain from impurities such as chaff, straw, and husk. The traditional method of using shovels and a sieve to allow the dried grains to fall from a height is time-consuming, uncomfortable, and requires significant manual labour. To overcome this problem developed solar photovoltaic powered winnower was developed and evaluated. The performance evaluation of the winnower was conducted for wheat at feed rates were 110 kg/h, 130 kg/h, 150 kg/h, 170 kg/h, and 190 kg/h, while for pearl millet, they were 480 kg/h, 520 kg/h, 560 kg/h, 600 kg/h, and 640 kg/h. 110 kg/h feed rate was found to be the most

⁺⁺ Principal & Dean;

[#] Assistant Professor & Head;

[†] Assistant Professor and Head FMPE;

[‡] Assistant Professor;

[^] Alumni;

*Corresponding author: E-mail: shitesh@nau.in;

suitable for wheat as it resulted in the highest cleaning efficiency of 95.86%, with the lowest grain loss of 0.36% and operating cost of 0.83 ₹/kg. After conducting various tests for pearl millet, it was determined that a feed rate of 480 kg/h was the most suitable. This rate resulted in the best cleaning efficiency of 96.17%, the lowest blow of grain at 0.67%,. The total cost of the Solar Powered Winnower was ₹ 56515.

Keywords: Winnower; solar power; photovoltaic (PV); wheat; pearl millet; cleaning efficiency.

1. INTRODUCTION

Winnowing is an agricultural method developed by ancient cultures for separating grain from foreign material like chaff, straw, husk. It involves simple process like throwing the mixture into the air so that the wind blows away the lighter chaff, while the heavier grains fall back down for recovery. The traditional method of using shovels and a sieve to allow the dried grains to fall from a height is time-consuming, uncomfortable, and requires significant manual labour.

Renewable energy refers to energy resources that occur naturally and repeatedly in the Environment, available abundantly everywhere, produced freely in the nature and can be harnessed for human benefit [1]. The available solar energy in tropical countries like India can be efficiently utilized to provide the source power supply for the post-harvest operations like grain winnowing. In such conditions, solar photovoltaic powered winnower is useful in areas with no utility lines. Photovoltaic systems are often less expensive and require less maintenance and operating cost than conventional electrical powers [2-6].

To overcome this issue solar photovoltaic powered winnower was designed and developed at College of Renewable Energy and Environmental Engineering, Sardarkrushinagar Dantiwada Agricultural University, Sardarkrushinagar Nagar (2023). The developed winnower performance was tested for varieties of wheat (GW-451), pearl millet (GHB-1129) and operational parameters were reported and evaluated.

2. MATERIALS AND METHODS

This chapter deals with the development process and performance evaluation of solar powered winnower. The stepwise methodology is given as under.

- i. General consideration for the development of solar-powered winnower for farmers [7]
- ii. Terminologies related to grain cleaning

- iii. Determination of specifications and selection of various components [8,9]
- iv. Physical Properties of wheat and pearl millet
- v. Lab testing and field evaluation of solar powered winnower
- vi. Economic evaluation of solar-powered winnower
- vii. Instruments used during study

2.1 Key Design Parameters

i. Selection of unit

A.C. Motor

ii. Determination of wattage of unit

Load	Wattage (w)
A.C. Motor	746 W

iii. Determination of running hours of loads

Load	Number	Wattage	usage
A.C. Motor	1	746	8 hours

iv. Determination of total load

$$\begin{aligned} \text{Total load} &= 1 \times 750 \times 8 \\ \text{Total load} &= 6000 \end{aligned}$$

Hence, designed a PV system capable of meeting the daily energy demand of 6000 Wh/day for this motor.

v. Number of PV modules required

$$\text{Array size} = \frac{\text{Array load}}{\text{insolation} \times \text{mismatch factor}}$$

$$\text{Array size} = \frac{6000}{5.65 \times 0.85}$$

$$\text{Array size} = 1249.34 \text{ Wp}$$

Thus, modules that can deliver 1250 W_p was selected.

2.2 Determination of Angle of Repose

The angle of repose was calculated by using equation [10]

$$\theta = \tan^{-1} \frac{2H}{D}$$

Where,

Θ= Angle of repose, degree

H= Height of cone, mm

D= Diameter of cone, mm

2.3 Determination of Bulk Density

The bulk density of wheat was determined by placing the wheat in container of cylindrical shape. The volume of container was found by measuring diameter and height of cylindrical container. The weight of wheat and pearl millet were measured by using an electric weighing balance. Bulk density of available wheat (GW-451) and pearl millet (GHB-1129) were determined [11].

The bulk density was calculated by using equation [10]

$$\text{Bulk density} \left(\frac{kg}{m^3} \right) = \frac{\text{weight of sample, kg}}{\text{volume occupied by sample, m}^3}$$

2.4 Determination of Moisture Content

The moisture content of wheat (GW-451) and pearl millet (GHB-1129) were measured with the help of hot air oven by oven dry method. The sample with the known weight was kept in oven at +105°C till the constant weight. The moisture content of sample was determined as per (ASTM D-3173).

$$\text{Moisture content}(\%wb) = \frac{W_2 - W_3}{W_2 - W_1} \times 100$$

Where,

W₁ = weight of empty box, g

W₂ = weight of empty box + sample, g

W₃ = Weight of empty box + sample after drying, g

2.5 Determination of Grain and Straw Ratio

The grain ratio was determined by dividing weight of grain in sample to the weight of the total sample. The weight of grains and weight of straw were measured separately from a selected lot of total samples.

$$\text{Grain and straw ratio} = \frac{\text{Weight of grain in sample}}{\text{Total Weight of sample}}$$

2.6 Air Velocity

Air velocity at distance of 10 inch was measured with the help of anemometer.

2.7 Field Testing of Solar Powered Winnower

The solar photovoltaic winnower was tested for varieties of wheat and pearl millet namely GW-451 and GHB-1129. The performance of solar powered winnower was conducted at 10-inch distance from the centrifugal blower and at constant feed rate for wheat 110 Kg/h and for pearl millet 480 Kg/h. Testing was carried out as per RNAM test code [12]. The various parameters like feed rate (kg/h), cleaning efficiency (%), blown grain (%) and power consumption (W) were determined as follows.

i. Feed rate

The solar powered winnower was evaluated for performance at 10-inch distance from centrifugal blower at feed constant feed rate. It was determined as,

$$\text{feed rate (kg/h)} = \frac{\text{weight of wheat mixture, kg}}{\text{operating time, h}}$$

ii. Percentage of blown grain

$$\text{Percentage of blown grain} = \frac{F}{A} \times 100$$

Where,

F = quantity of whole grain collected at chaff outlet per unit time, kg

A = Total grain input per unit by weight, kg

iii. Cleaning efficiency

$$\text{Cleaning efficiency} = \frac{I}{J} \times 100$$

Where,

I = Weight of whole grain per unit time at main grain outlet, kg

J = Weight of whole material per unit time at the main outlet, kg

iv. Measurement of energy consumption

Energy consumption for winnowing was calculated by voltage and current which measured by clamp meter.

2.8 Analysis of Solar Powered Winnower for Operational Difficulties

Field testing operational difficulties were found as follows

i. Irregular inflow of feed from hopper.

During field testing, it was observed that, feed hopper outlet was frequently clogging and interlocking grains and straw.

3. RESULTS AND DISCUSSION

This designed solar powered winnower schematic diagram shown in Plate1 and actual developed system shown in Plate 2.

The results obtained in this study were presented and evaluated under the following sub headings.

3.1 Physical Properties of Wheat and Pearl Millet

Table 1 shows the mean value of angle of repose and bulk density for wheat and pearl millet were found 34.25 and 27.35 degree and 770 kg/m³ and 825 kg/m³, respectively.

3.2 Performance Evaluation of Solar Powered Winnower

The solar operated winnower was evaluated at varying feed rate of 110 kg/h to 190 kg/h for wheat and 480 to 640 kg/h for pearl millet similarly different feed rate experiment conducted [13,14]

3.2.1 Cleaning efficiency

The study revealed that the cleaning efficiency for wheat ranged from 81.45% to 95.86%, and for pearl millet, it ranged from 86.46% to 96.17%, depending on the feed rate. The highest cleaning efficiency for wheat was observed at a feed rate of 110 kg/h, with a cleaning efficiency of 95.86%. For pearl millet, the highest efficiency was observed at a feed rate of 480 kg/h, with a cleaning efficiency of 96.17%.

3.2.2 Blown grain with respect to federates

During an experiment, it was observed that increasing the feed rate for wheat and pearl millet had an impact on the amount of blown grain. When the feed rate was set to 110 kg/h for wheat and 480 kg/h for pearl millet, and the grain

was blown from 10 inches away from the blower, the amount of blown grain was 36% and 0.67%, respectively.

Increasing the feed rate to 130 kg/h for wheat and 520 kg/h for pearl millet resulted in a blown grain of 0.76% and 0.89%, respectively. A further increase to 190 kg/h for wheat and 640 kg/h for pearl millet resulted in a blown grain of 3.3% and 4.32%, respectively. This clearly indicates that as the feed rate was increased, the amount of blown grain also increased.

It was observed that, when we set the feed rate 110 kg/h for wheat and 480 kg/h for pearl millet at 10 inches from the blower blown grain were 0.36 per cent and 0.67 per cent. When feed rate was 130 kg/h blown grain was 0.76 per cent for wheat, 520 kg/h blown grain was 0.89 per cent for pearl millet, at 190 kg/h blown grain was 3.3 per cent for wheat and 640 kg/h blown grain was 4.32 per cent. that clearly shows us when we increase feed rate blown grains was also increased.

3.2.3 Time taken for wheat and pearl millet with respect to feed of mixture

It was observed that, it took 60 minutes when 110 kg of wheat was added and 480 kg of pearl millet was added. When 130 kg and 150 kg of wheat were added, it took 70.9 minutes and 81.8 minutes. when 520 kg and 560 kg of pearl millet were added, it took 65 minutes and 70 minutes.

3.2.4 Power consumption for wheat and pearl millet with respect to feed of mixture

Power Consumption were found varies from the 750 Watt to 1295.38 Watt for wheat and 750 Watt to 1000 Watt for pearl millet at different feed of mixture. The maximum Power Consumption were found 1295.38 Watt at 190 kg feed of mixture for wheat and 1000 Watt at 640 kg feed of mixture for pearl millet. Minimum Power Consumption were found 750 Watt with 110 kg feed of mixture for wheat and 480 kg feed of mixture for pearl millet. The Power Consumption was continuously increased with increased the feed of mixture because when we feed a more mixture it takes more time to clean that's why power consumption was increased. The total cost of the Solar Powered Winnower was ₹ 56515.

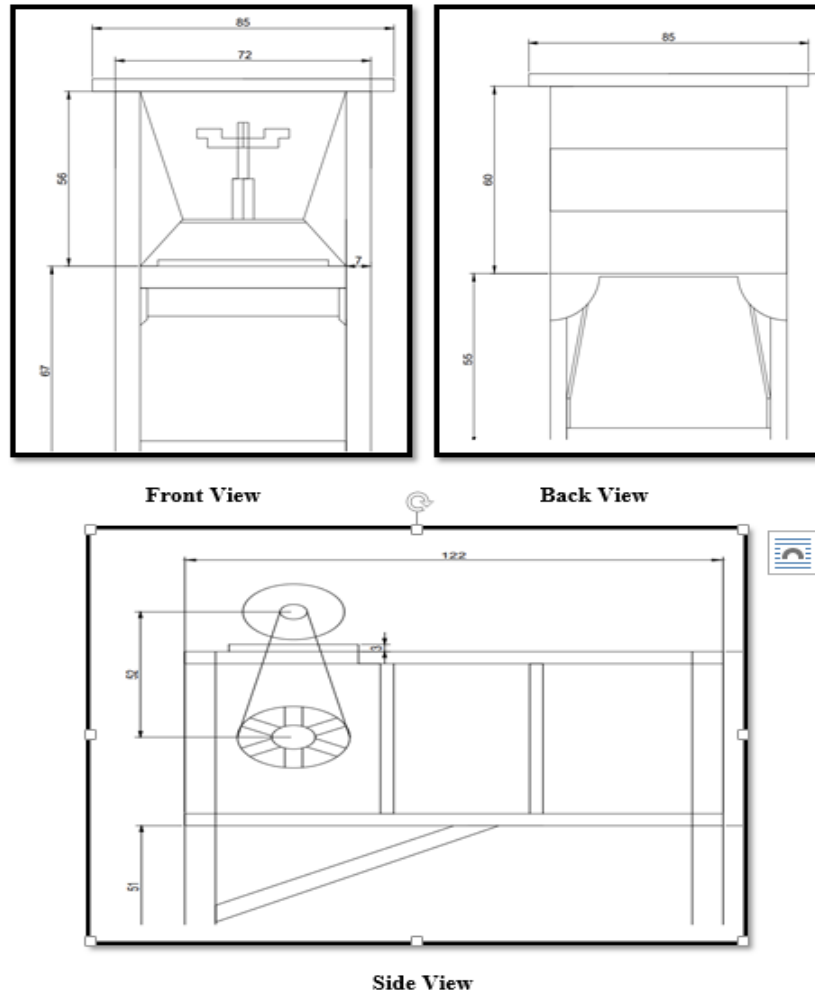


Plate 1. schematic diagram of solar powered winnower



Plate 2. Developed solar powered winnower

Table 1. Physical properties of wheat and pearl millet

Sr. No.	Wheat		Pearl millet	
	Angle of repose, degree	Bulk density, kg/m ³	Angle of repose, degree	Bulk density, kg/m ³
1	33.75	765.00	26.72	822.00
2	34.50	790.00	27.35	830.00
3	34.75	755.00	28.49	827.00
4	34.25	765.00	26.56	818.00
5	34.00	775.00	27.63	828.00
Mean	34.25	770.00	27.35	825.00

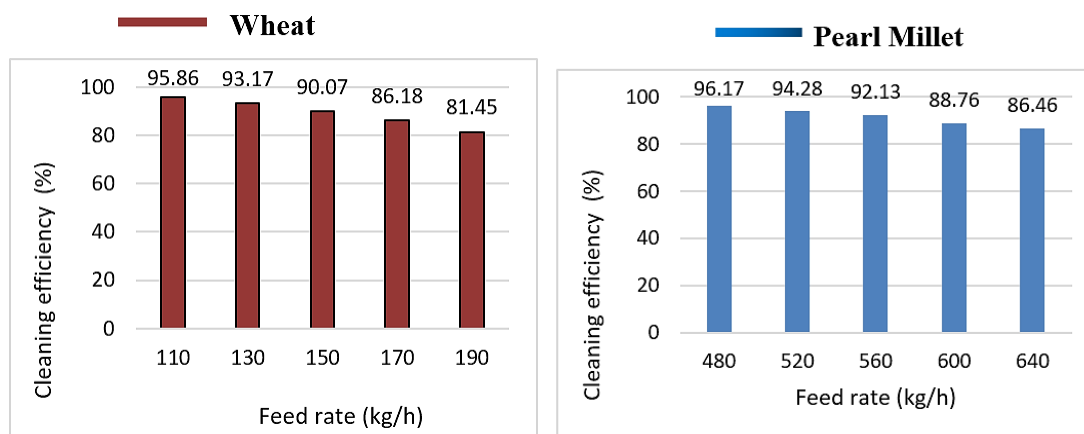


Fig. 1. Cleaning efficiency of wheat and pearl millet with respect to feed rate

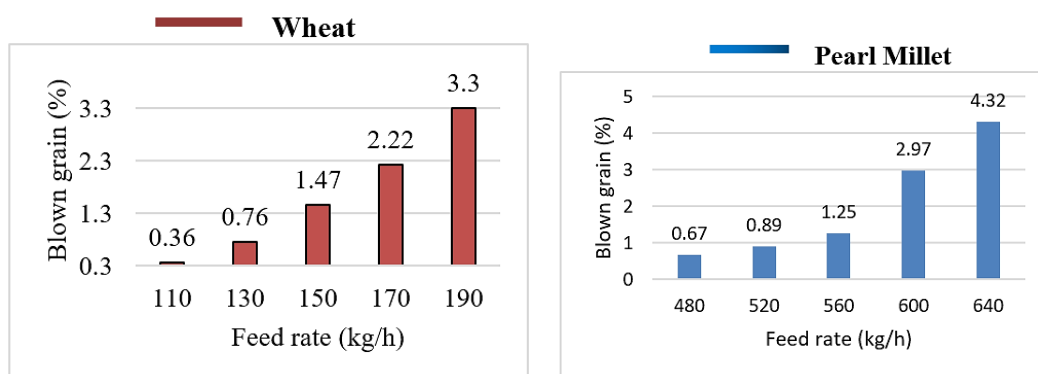


Fig. 2. Blown grain of wheat and pearl millet with respect to feed rate

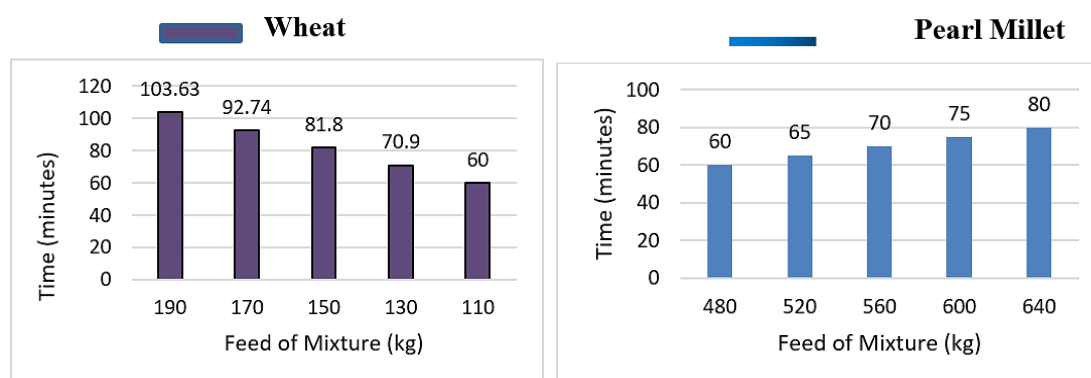


Fig. 3. Time taken for wheat and pearl millet with respect to feed of mixture

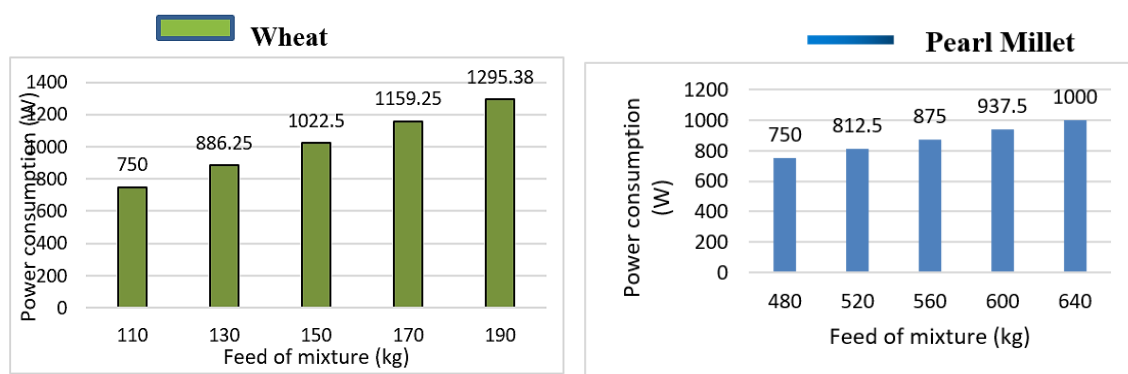


Fig. 4. Power consumption for wheat and pearl millet with respect to feed of mixture

4. CONCLUSION

The average angle of repose and bulk density of wheat and pearl millet were found 34.25 and 27.35 degree and 770 kg/m³ and 825 kg/m³, respectively. Performance evaluation of the winnower was carried out for varying feed rate for wheat and pearl millet. It found that most suitable feed rate for wheat was 110 kg/h as it registered best cleaning efficiency of 95.86 per cent, minimum blow of grain i.e., 0.36 per cent and lowest operating cost of 0.83 ₹/kg. For pearl millet 480 kg/h feed rate was found most suitable as it registered best cleaning efficiency of 96.17 per cent, minimum blow of grain i.e., 0.67 per cent. The total cost of Solar Powered Winnower worked out was ₹ 56515/-. Therefore solar operated winnowing technology is suitable for rural farmers.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

- Sanchavat H, Modi VV, Modi VM. Role of renewable energy in agriculture in context to environmental protection. *Multillogic in Science*. 2019;8(Special Issue –A):159-163.
- Arafa GK, MT Ebaid, HA El-Gendy. Process engineering development of a local machine for winnowing and grading flax seeds. *Misr J. Ag. Eng.* 2009;26(1): 343-358.
- Bhanage GB, PU Shahare, PS Deshmukh, PB Gaikwad, VV Aware. Mechanization in harvesting and post-harvest operation for paddy In konkan region and Its economic feasibility. *J. Indian Soc. Coastal Agric. Res.* 2016;34(2):43-49.
- Bhanage GB, PU Shahare, PS Deshmukh, PB Gaikwad, VV Aware. Mechanization in harvesting and post-harvest operation for PADDY in konkan region and its economic Feasibility. *J. Indian Soc. Coastal Agric. Res.* 2016;34(2):43-49.
- Gbabo A, Ibrahim Mohammed Gana and Matthew Suberu Amoto. Design and fabrication and testing of a millet thresher. *Net Journal of Agricultural Science*. 2013;1(4):100-106. ISSN: 2315-9766.
- Pachgare MN, Kolase SH, Adhoo, and GS Ingle. Centrifugal winnower for Jowar. *Agril. Engg. Today*. 1993;17(5-6):40-50.
- Aditya B, Shantanu P. Novel solar powered winnowing machine design. *Journal of Emerging Technologies and Innovative Research (JETIR)*. 2021; 8(9):652-660.
- Abdul-Rasaq, A Adebowale, Lateef O Sanni, Hameed O Owo, Olayinka R Karim. Effect of variety and moisture content on some engineering properties of paddy rice. *Journal of Food Science and Technology*. 2011;48(5):551-559.
- Mutai Emmanuel Beattach kinyor, MO Owino, AM Swalleh. Design and fabrication of a pedal powered paddy thresher fitted with winnowing equipment. Conference: University of Eldoret 1st multidisciplinary conference at: Eldoret. 2015;1. DOI: 10.13140/RG.2.1.1595.7848
- Varnamkhasti MG, Mobli H Raee, SMA Jafari, AR Keyhani, M Heidari Soltanabadi, S Rafiee, K. Kheiralipour. Some engineering properties of paddy (var. Sazandegi). *Journal Article*. 2007;9(5):763-766.
- Bhanage GB, PU Shahare, vijay aware,

- PS Deshmukh. Engineering properties of paddy for designing of threshing mechanism. International Journal of Agricultural Science and Research. 2017; 7(1):215-224.
12. Swain SK, TK Biswal, DK Das, AK Goel. Performance evaluation of hold -on type power operated paddy thresher cum winnower. Agricultural Engineering Today. 2002;26(3):17-24.
13. Kadam RG, Dhande KG. Performance Evaluation of Power Operated Paddy Winnower. International Journal of Agricultural Engineering. 2016;9(1):47-52.
14. Jagdale M, AG Mohod, YP Khandetod, RM Dharaskar, KG Dhande. Evaluation of solar photovoltaic (SPV) Operated Paddy Winnower. Journal of Advanced Agricultural Research & Technology. 2017; 1(2):177 -182.

© 2024 Modi et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:
<https://www.sdiarticle5.com/review-history/112786>